

GLOBAL JOURNAL OF ADVANCED ENGINEERING TECHNOLOGIES AND SCIENCES**THE INFLUENCES OF AIR INTAKE TEMPERATURE ON THE TURBOCHARGED GASOLINE ENGINE'S OTTO CYCLE**

Feng Liu*

* Department of Technology, Yinjian Automobile Repair Co., Ltd., Beijing, China

DOI: 10.5281/zenodo.1446191

ABSTRACT

This thesis is about the calculations and researches of the improved coolant system of turbocharged gasoline engine, it introduces the basic concept of gasoline engine's turbo technology, and shows the detailed information and parameters of 486 turbocharged gasoline engine, established the formulas of the Otto cycle and its relevant parameters, emphasized to analyze the influences of the intake air temperature on the engine's Otto cycle. The effects of the turbo gasoline intake temperature mainly contains 2 points: the outlet temperature of the turbo and the temperature decline effect of the coolant system; This thesis compares the effects of gasoline's Otto Cycle which configures or not with a middle cooler, utilized a thermal dynamics calculation method to research, calculate and analysis the parameters of the turbocharged engine's Otto cycle, the results are corresponding with the experiment(the thermal balance experiment), the property indices are included circulate thermal efficiency, exergy efficiency and average valid pressure. Through the contrasts and analysis, it obviously shows that, with the middle coolant, it has an advantage in the average valid pressure, intake temperature, and exergy efficiency. Absolutely it is necessary and efficient configured with middle coolant on the turbocharged gasoline engine.

KEYWORDS: Intake Air Temperature, Gasoline Engine, Middle Cooler, Otto Cycle.**INTRODUCTION**

The maximum power that can be provided by a gasoline engine is mainly determined by the heat released by the effective combustion of the fuel in the cylinder. The pressurization system allows the air to be compressed before entering the cylinder, increasing its density. Under the same cylinder working volume, it has more new air to enter the cylinder, which can increase the circulating heat absorption, that is, the oil supply, and obtain larger output power[1][2].

Basic concept of gasoline engine turbo technology

Gasoline engine supercharging technology is now quite mature, and with the continuous improvement of the automobile manufacturing industry, many high-performance gasoline engines are currently using supercharging technology. Generally speaking, the turbocharged power can be increased by 40-60% or more than the original machine, and the fuel economy and the average effective pressure can be improved, which is an effective way to strengthen the gasoline engine.

STRUCTURES AND PRINCIPLES OF GASOLINE ENGINE TURBOCHARGER COOLING SYSTEM

486 turbocharged gasoline engine overviews:

The development of the gasoline engine was carried out on the 486 turbocharged gasoline engine [2]. The relevant parameters of the gasoline engine are shown in Table 1:

Table 1 Relevant parameters of 486 turbocharged gasoline engine

Model	486 Turbocharged Gasoline
Type	4 Cylinder 16V, DOHC Turbocharged (Middle Coolant) Multiple sequential injection: 1-3-4-2
Exhaust Volume	1.998L
Turbocharged ratio	1.75:1
Cylinder Diameter × Piston Travel	86×86mm
Rated Power/Speed (kW/rpm)	125/5000
Maximum Net Torque/Speed (Nm/rpm)	250/2000-4000
Low Speed Torque (1500rpm)	200Nm
External characteristic minimum fuel consumption rate	265g/(kW·h)
Compress Ratio	8.5:1

Related with the table above, The turbocharger is an exhaust turbocharger system [2]: the compressor is co axially connected with the turbine to form a turbocharger, and the turbine is driven by the exhaust energy to drive the compressor to work to achieve intake boost. The gasoline engine exhaust turbocharger system includes [3]: compressor, turbocharger, (middle cooler) and other components.

Turbocharger Coolant System

Turbocharger coolant system consists of the following aspects: mainly including cooling water pipes: connecting water jackets and superchargers; air-cooled middle coolers, superchargers, etc. In Figure 1 is an middle cooler and Figure 2 shows a turbocharger [4][5][6].



Figure 1. Middle Cooler



Figure2. Turbocharger

Equipped with a middle cooler, the high-temperature gas is cooled before being injected into the cylinder, and the high-temperature and high-pressure air is dispersed into many small pipes, and the high-temperature air flows through the normal temperature outside the pipe to achieve the purpose of cooling and improve the charging efficiency [7].

METHOD OF THE RESEARCHES ON THE INFLUENCES OF THE INTAKE AIR TEMPERATURE ON THE OTTO CYCLE

The Otto cycle refers to the ideal reversible cycle of constant volume heating of a gasoline engine: an irreversible constant volume heat release, a reversible constant volume heat absorption and an ideal inner reversible cycle composed of two degenerative processes. The intake air temperature has a fairly direct impact on the Otto cycle of the gasoline engine. The maximum torque of the gasoline engine is the maximum torque speed, the natural inhalation temperature is 290K, 17°C, without the middle cooler, the temperature of the pressurized air can reach 77°C, that is 350K, and in the case of equipment middle cooler, The intake air temperature can be reduced by 30°C, that is 47°C, 320K. Details are shown in table 2[8].

Basic Formulas

(1) Cycle Heat Efficiency

$$\eta_t = 1 - \frac{1}{\varepsilon_c^{\kappa-1}} \quad \text{---Only for Otto Cycle} \quad (1)$$

(2) Average Valid Pressure of the Cycle

$$\frac{p_t}{p_a} = \left(\frac{\eta_t Q_B}{c_v T_a} \right) \left(\frac{1}{\kappa-1} \right) \left(\frac{Q}{\varepsilon_c - 1} \right)$$

(3) Exergy and Exergy Efficiency

$$\text{Heat Exergy in Heat Absorption Capacity } Q_B : e_{x,Q} = Q_B - a_{n,Q} = \left(1 - \frac{T_0}{T_{1m}} \right) Q_B = Q_B - T_0 \Delta S_1 \quad (3)$$

Average Temperature of Heat Absorption:

$$T_{1m} = \frac{Q_B}{\Delta S_1} \quad (4)$$

Exergy Efficiency:

$$\eta_{e_x} = \frac{w_{net}}{e_{x,Q}} \quad (5)$$

Among: $e_{x,Q}$ - Heat Exergy, kJ/kg; $a_{n,Q}$ - Heat Anergy, kJ/kg; T_{1m} - Average Temperature of Heat Absorption, K; Q_B - Cycle Heat Absorption Capacity, kJ/kg; T_0 - Environment Temperature, K; ΔS_1 - Entropy Increase during Heat Absorption Process, kJ/(kg.K); w_{net} - Efficient Exergy(Cycle Work), kJ/kg;

Exergy Loss:

$$i = T_0 s_g = T_0 (\Delta S_2 + \Delta S_0) = T_0 (-\Delta S_1 + \frac{Q_2}{T_0}) = Q_2 - a_{n,Q} = Q_2 - T_0 \Delta S_1 \quad (6)$$

Among them: i - Exergy Loss, kJ/kg; s_g - Entropy Generation, kJ/(kg.K); ΔS_0 - Environment Entropy Increase during Exothermic Process, kJ/(kg.K); Q_2 - Cycle Heat Release, kJ/kg; ΔS_2 - Entropy Increase during Exothermic Process, kJ/(kg.K)

RESULTS OF THE RESEARCHES ON THE INFLUENCES OF THE INTAKE AIR TEMPERATURE ON THE OTTO CYCLE

Boundary Conditions And Research Results

Table 2 is the air intake temperature condition.

Table 2 Air Intake Condition

Intake Temperature	Temp. before Turbocharged	Temp. after Turbocharged
without Middle Cooler	290K	350K
with Middle Cooler	290K	320K

The article mainly researches and analysis the cycle heat efficiency, cycle average valid pressure and exergy efficiency in the Otto cycle with and without middle cooler.

Figure 3 and figure 4 show p-v and T-s charts of the Otto cycle, among them, the number with a ‘’ refers to be with a middle coolant, without a ‘’ refers to be without one. Thus, it will lead the air charging efficiency increase, at the same time, acquire larger output power.

There are several relevant parameters below:

$$\text{Compression ratio } \mathcal{E}_c = 8.5 \quad (7)$$

$$\text{Constant Entropy index: } \kappa = 1.4 \quad (8)$$

$$c_v = 0.718 \text{kJ} / (\text{kg} \cdot \text{K}) \quad (9)$$

$$c_p = 1.005 \text{kJ} / (\text{kg} \cdot \text{K}) \quad (10)$$

Without middle cooler, point 1 state:

$$p_a = 1.75 \text{bar} \quad (11)$$

$$T_a = 350 \text{K} \quad (12)$$

With middle cooler, point 1' state:

$$p_a' = 1.75 \text{bar} \quad (13)$$

$$T_a' = 320 \text{K} \quad (14)$$

Highest pressure:

$$p_3 = p_3' = 80 \text{bar} \quad (15)$$

Comment: 1→1' Entropy Increase:

$$\Delta s_{11'} = c_p \ln \frac{T_1'}{T_1} - R_g \ln \frac{p_1'}{p_1} = 1.005 \ln \left(\frac{320}{350} \right) = -0.09 \text{kJ} / (\text{kg} \cdot \text{K}) < 0 \quad (16)$$

Therefore, 1→1' Entropy Increase is minus value, point 1' is at the left down side in T-s chart(Figure 3).

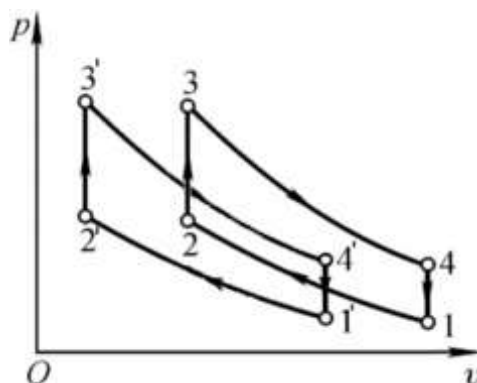


Figure 3. p-v chart of Otto cycle

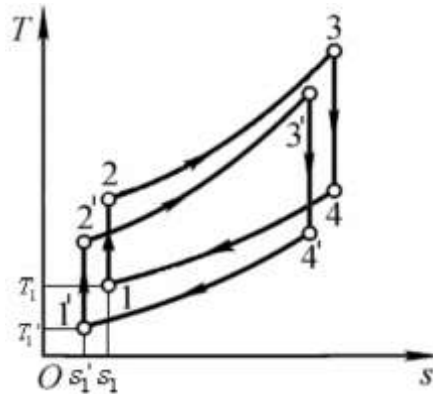


Figure 4. T-s chart of Otto cycle

From formula (2) could be concluded that the cycle heat efficiency η_t is only related to the compression ratio ϵ_c , so the cycle heat efficiency is equal whether the middle cooler is configured. Substituting data, $\eta_t = 57.5\%$ (18)

Calculation of the Cycle Heat absorption Q_B

1→2 constant entropy process, $T_2 v_2^{\kappa-1} = T_a v_a^{\kappa-1}$ (19)

Then, $T_2 = T_a \epsilon_c^{\kappa-1}$ (20)

Substitute relevant data, $T_2 = 824K$ (21)

Through $p_2 v_2^\kappa = p_a v_a^\kappa$ (22)

Substitute relevant data,

$p_2 = p_2' = p_a \epsilon_c^\kappa = 35bar$ (23)

2→3 reversible constant volume $\frac{p_3}{T_3} = \frac{p_2}{T_2}$ (24)

Substitute relevant data, $T_3 = 1883K$ (25)

$T_3' = 1721K$ (26)

$Q_B = c_v (T_3 - T_2) = 0.718 \times (1883 - 724) = 760.4kJ / kg$ (27)

$Q_B' = c_v (T_3' - T_2') = 0.718 \times (1721 - 753) = 695.0kJ / kg$ (28)

Cycle average valid pressure

Substitute relevant data to formula (2),

$p_t = 8.63bar$ (29)

$p_t' = 8.73bar > p_t$ (30)

It is worth mentioning that: in the theoretical calculation, the average valid pressure of the cycle is equal whether or not equipped with an middle cooler; but in actual experiments, the intake air temperature will rise due to the absence of the middle cooler, and the time will cause the intake pipe seal softened, the intake seal will be not tight, and a small amount of gas is leaked, resulting in the average valid pressure of the cycle being lower than the average valid pressure of the cycle equipped with the middle cooler. The specific experimental conditions can be referred to the reference [8][9].

3→4 constant entropy process,

$T_4 v_4^{\kappa-1} = T_3 v_3^{\kappa-1}$ (31)

$T_4 = T_3 \left(\frac{1}{\epsilon_c} \right)^{\kappa-1}$ (32)

$T_4 = 800K$

Substitute relevant data, (33)

$$T_4' = 731K \quad (34)$$

Heat Release,

$$Q_2 = c_v(T_4 - T_1) = 0.718 \times (850 - 350) = 323.1kJ / kg \quad (35)$$

$$Q_2' = c_v(T_4' - T_1') = 0.718 \times (731 - 320) = 295.1kJ / kg \quad (36)$$

Efficient Exergy,

$$w_{net} = Q_B - Q_2 = 760.4 - 323.1 = 437.3kJ / kg \quad (37)$$

$$w_{net}' = Q_B' - Q_2' = 695.0 - 295.1 = 399.9kJ / kg \quad (38)$$

Entropy Increase during Heat Absorption Process:

$$\Delta s_{23} = c_v \ln \frac{T_3}{T_2} + R_g \ln \frac{v_3}{v_2} = 0.718 \ln \frac{T_3}{T_2} = 0.718 \ln \left(\frac{1883}{824} \right) = 0.593kJ / (kg \square K) = \Delta s_{2,3} \quad (39)$$

Heat Energy in Heat Absorption Capacity:

$$a_{n,Q} = T_0 \Delta s_{23} = 290 \times 0.593 = 172.0kJ / kg = a_{n,Q}' \quad (40)$$

Heat Exergy in Heat Absorption Capacity: $760.4 - 172.0 = 588kJ / kg$

$$e_{x,Q}' = Q_B' - a_{n,Q}' = 695.0 - 172.0 = 523kJ / kg \quad (41)$$

$$(42)$$

Average Temperature of Heat Absorption:

$$T_{1m} = \frac{Q_B}{\Delta s_{23}} = \frac{760.4}{0.593} = 1282K \quad (43)$$

$$T_{1m}' = \frac{Q_B'}{\Delta s_{2,3}} = \frac{695.0}{0.593} = 1172K \quad (44)$$

Exergy Efficiency:

$$\eta_{e_x}' = \frac{w_{net}'}{e_{x,Q}'} = \frac{399.9}{523} = 76.46\% \quad (45)$$

$$\eta_{e_x} = \frac{w_{net}}{e_{x,Q}} = \frac{437.3}{588} = 74.37\% \quad (46)$$

The above situation is inner reversible; however, the system's constant heat release process is irreversible: its average exothermic temperature T_{2m} is larger than the ambient temperature T_0 , and there will be an exergy loss, the same below.

Exergy Loss:

$$i = T_0 s_g = Q_2 - a_{n,Q} = 323.1 - 172.0 = 151.1kJ / kg \quad (47)$$

$$i' = T_0 s_g' = Q_2' - a_{n,Q}' = 295.1 - 172.0 = 123.1kJ / kg \quad (48)$$

Table 3 is the contrast of the Otto cycle research results, under Otto cycle, in addition to the lifting compression ratio ϵ_c , all the measures to improve the theoretical cycle thermal efficiency of the gasoline engine, and increase the inlet pressure of the cycle starting point, reduce the intake air temperature, and improve the charging efficiency are all beneficial to the increase of the cycle average effective pressure, the efficiency of the exergy and the output power.

In addition, the turbocharged gasoline engine equipped with an middle cooler has an intake air temperature and a circulating average valid pressure and exergy efficiency also have certain advantages.

Table 3. Contrasts of research results of Otto cycle

Middle coolant	Thermal Efficiency	Heat absorption	Average valid p.	Exergy Efficiency
N	57,5%	760.4kJ/kg	8.63bar	74.37%
Y	57.5%	695.0kJ/kg	8.73bar	76.46%

Experiment Comparison

Table 4 shows the contrasts of the calculation results and the experiment result, through the thermal balance experiment, the basic data is corresponding with each other, it can be concluded that the calculation method and results are convincing and corresponding basically.

Table 4. Comparison of the calculation results and thermal balance results

Parameter(rated speed)	Calculation	Experiment	Error Rate
Intake Pressure	1.75bar	1.85bar	20%
Outlet Pressure	1074mbar	849mbar	15%
Water Intake Temp.	105°C	92.7°C	11%
Water Outlet Temp.	109.2°C	99.1°C	12%
Difference Temp. between Water inlet and outlet	4.2°C	6.4°C	25%

Through the table above, there are still some error rates between the calculation and experiment results, they're mainly caused from the situation of the experiment, however, the rates are basically within the limits of the acceptance and reasonable, could be ignored[9].

Additional Introductions

The above are the effects and advantages of the middle cooler on the turbocharged gasoline engine; in addition to the advantages of improving the power and economy of the gasoline engine, the turbocharging technology itself also reflects:

- 1) The quality and design size of the turbocharger are relatively small compared with that of the gasoline engine. When the turbocharged pressure can make the total mass and volume of the gasoline engine basically unchanged, the output power is greatly improved, the power is increased, the specific power is The specific volume power is greatly improved, which can reduce the cost per unit of power and enhance the utilization rate of materials;
- 2) Compared with naturally aspirated gasoline engines, the exhaust gas can be further expanded in the turbine to reduce exhaust noise[10][11][12];
- 3) After the gasoline engine is turbocharged, it is beneficial to the power recovery under the condition of thin air in the plateau, so that it can reach or approach the lower altitude performance, more stable, enhanced and efficient.

CONCLUSIONS

The concepts of the gasoline engine turbocharged system and the structure and working principle of the 486 turbocharged gasoline engine turbocharged system are introduced. The difference in structure and working principle of the gasoline engine turbocharged system equipped with the middle cooler and without middle cooler is after calculation and experimental research, the intake air temperature, exergy efficiency and average valid pressure of the gasoline engine Otto cycle are obtained. The calculation and experimental results show correction of the calculation process, and the middle cooler has the intake air temperature and the exergy efficiency.

And the average effective pressure has certain advantages; introduce the advantages of the gasoline engine turbocharged system on all aspects of the gasoline engine;

REFERENCES

- [1] Liu Feng 2018(Jan.) Research on the Exergy of Automobile Engine inner Cylinder Thermal Cycle *J. Automobile Parts*. 41-45
- [2] Liu Feng 2017(Nov.) Research on the Exergy of Automotive Engine inner Cylinder Thermal Cycle *J. Auto Time*. 89-92
- [3] Liu Feng 2017(Mar.) Research on the Sabah Cycle of Diesel with a Common Rail Injection System and Diesel Cycle *J. Shanghai Auto*. 30-34, 46.
- [4] Liu Feng 2017(Apr.) Calculation on the Sabah Cycle with a Common Rail Injection System Compared with Diesel Cycle *J. Automobile Parts*. 62-64
- [5] Liu Feng 2017(May) The Influences of Common Rail Pressure on Sabah Cycle *J. Automobile Parts*. 63-65.
- [6] F Liu. Research and Analysis on the exergy of Automotive Engine Inner Cylinder Thermal Cycle[J].



International Journal of Engineering Sciences & Research Technology: Vol. 7 Iss. 2, Feb. 25th, 18: 539-545

- [7] F Liu. Analysis on the exergy of Automobile Engine Inner Cylinder Thermodynamic Cycle[J]. Global Journal of Advanced Engineering Technologies & Sciences: 5(2), Feb. 28th, 18: 30-36
- [8] Liu Feng 2016(Dec.) Research on the Intake Temperature Influences of Turbocharged Gasoline's Otto Cycle *J.Auto Time*. 80-81
- [9] Liu Feng 2013(Dec.) Simulation Analysis Research on the Coolant System of Turbo Gasoline Engine with Flowmaster J. Small Internal Combustion Engine and Motorcycle. 53-58
- [10] Liu Feng 2017(Mar.) Researches on the Contrasts between Sabah Cycle with a Common Rail Injection System and Diesel Cycle *J. Auto Industry Research*. 57-62
- [11] Liu Feng 2017(Aug.) The Influences of Diesel's Common Rail Pressure on Sabah Cycle *J.Auto Industry Research*. 57-62
- [12] Feng Liu. Researches on the Influences of Common Rail Pressures on the Diesel Engine's Sabah Cycle[J]. Advances in Applied Sciences(AAS): Vol. 3, Iss. 3, Jun. 18: 19-27.